



**Handi
Foam®**
Completely Professional.™



PRODUCT CATALOG

LOW PRESSURE POLYURETHANE FOAM PRODUCTS
CREATED WITH THE PROFESSIONAL IN MIND





SPRAY POLYURETHANE FOAMS



HANDIFOAM® E84 (HFO)

LOW PRESSURE SPRAY POLYURETHANE FOAM (SPF)

A low-pressure spray polyurethane foam designed to fill and insulate large voids and surfaces. With its excellent adhesion properties, E84 creates a continuous air barrier completing the building envelope, resulting in improved indoor air quality and lower heating and cooling costs.

● GREENGUARD GOLD CERTIFIED

R-Value

Initial: 6.6 at 1" thick
Aged: 6.1 at 1" thick

Density

Free Rise:
1.75 lbs/ft³ (28.0 kg/m³)

Curing Times

Tack-Free: 15–30 sec.
Cuttable: ~ 10 min.
Fully Cured: 1 hr.

Shelf Life

Disposable: 24 months
Refill: 6 months

Fire Rating

ASTM E84 at 2" thick
Flame Spread: 5
Smoke Developed: 450

ITEM	DESCRIPTION	COVERAGE*
P12130	II-15 HANDIFOAM	15 bdft (1.4 m ²)
P12135	II-105 HANDIFOAM	105 bdft (9.8 m ²)
P12140	II-205 HANDIFOAM	205 bdft (19 m ²)
P12145	II-605 HANDIFOAM	605 bdft (56.2 m ²)
P12145W	II-605 HANDIFOAM <small>INCLUDES 25' GHA</small>	605 bdft (56.2 m ²)
P12146	II-605 HANDIFOAM <small>EXCLUDES GHA / CYLINDERS ONLY</small>	605 bdft (56.2 m ²)
P23000	SYSTEM 8 REFILL	1,010 bdft (93.9 m ²)
P23100	SYSTEM 17 REFILL	1,980 bdft (184 m ²)
P23200	SYSTEM 27 REFILL	3,120 bdft (290 m ²)
P23400	SYSTEM 60 REFILL	6,840 bdft (635 m ²)
P23800	SYSTEM 120 REFILL	11,400 bdft (1,059 m ²)



HANDIFOAM® OPEN CELL (HFO)

LOW PRESSURE SPRAY POLYURETHANE FOAM (SPF)

A low density, open cell formulation used to fill and insulate large voids and surfaces and is excellent for sound deadening and reducing noise levels where a lower density foam is required.

R-Value

Aged:
4.4 at 1" thick

Density

Free Rise:
0.72 lb/ft³
(11.5 kg/m³)

Cell Structure

>90% OPEN
cell content

Curing Times

Tack-Free: 75 sec.
Cuttable: 15 min. (approx.)
Fully Cured: 30 min.

Shelf Life

Disposable:
12 months

Fire Rating

ASTM E84 Class B at 4" thick
Flame Spread: 65
Smoke Developed: 450

ITEM	DESCRIPTION	COVERAGE*
P12630	II-40 HANDIFOAM	40 bdft (3.7 m ²)
P12005	II-250 HANDIFOAM	250 bdft (23 m ²)
P12010	II-500 HANDIFOAM	500 bdft (46.5 m ²)
P12015	II-1550 HANDIFOAM	1,550 bdft (144 m ²)

● GREENGUARD GOLD CERTIFIED



HANDIFOAM® FR BLACK (HFO)

LOW PRESSURE SPRAY POLYURETHANE FOAM (SPF)

Formulated black in color and ideal for use in a vehicle's undercarriage, engine compartment and frame to reduce vibrations, helping to increase the longevity of the vehicle and deaden sound.

R-Value	Density	Curing Times	Shelf Life	Fire Rating
6.5 at 1" thick	Free Rise: 1.75 lbs/ft ³ (28 kg/m ³)	Tack-Free: 30–45 sec. Cuttable: ≈ 10 min. Fully Cured: 1 hr.	Disposable: 12 months Refill: 6 months	ASTM E84 at 1" thick Flame Spread: 20 Smoke Developed: 350

ITEM	DESCRIPTION	COVERAGE*
P12741	II-600 HANDIFOAM	601 ft ² (55.8 m ²)
P23083	SYSTEM 8 REFILL	1,015 ft ² (94.3 m ²)
P23223	SYSTEM 60 REFILL	7,783 ft ² (723 m ²)
P23317	SYSTEM 120 REFILL	13,989 ft ² (1,300 m ²)



HANDIFOAM® HIGH DENSITY (HFO)

LOW PRESSURE SPRAY POLYURETHANE FOAM (SPF)

Specifically designed for applications where a high compressive strength foam is required. It is ideally suited for roofing repairs or any application where foot traffic is expected.

R-Value	Density	Compressive Strength	Curing Times	Shelf Life	Fire Rating
6.5 at 1" thick	3.1 lbs/ft ³ (50 kg/m ³)	40 lbf/in ² (275 kPa) parallel	Tack-Free: 30–60 sec. Cuttable: 2–5 min. Fully Cured: 1 hr.	Disposable: 12 months	ASTM E84 at 2" thick Flame Spread: 15 Smoke Developed: 450

ITEM	DESCRIPTION	COVERAGE*
P12025	II-60 HANDIFOAM	60 bdf (5.60 m ²)
P12030	II-115 HANDIFOAM	115 bdf (10.70 m ²)
P12035	II-340 HANDIFOAM	340 bdf (31.80 m ²)



HANDIFOAM® LINER ADHESIVE (HFO)

LOW PRESSURE SPRAY POLYURETHANE FOAM (SPF)

A strong adhesive designed specifically for construction and repair of refrigerated trailers and adhering foam panels to various substrates.

Density	Tensile Strength*	Shelf Life	Fire Rating
2.5 lbs/ft ³ (40 kg/m ³)	23 psi (158.6 kPa) <small>*Uncompressed foam only</small>	Disposable: 12 months	FMVSS 302 / CMVSS 302 Meets burn rate 0/00 min

ITEM	DESCRIPTION	COVERAGE*
P12040	II-532 HANDIFOAM	532 ft ² (49.40 m ²)



POUR-IN-PLACE POLYURETHANE FOAMS



HANDIFOAM® CHANNEL FILL (HFO)

LOW PRESSURE POUR-IN-PLACE POLYURETHANE FOAM (PIP)

Powered by the patented High Flow Technology® to allow the chemical to flow more thoroughly and at greater distances making it ideal for a variety of void filling applications.

R-Value	Density	Curing Times	Gel Time	Shelf Life
6.0 at 1" thick	2.5 lbs/ft ³ (40.1 kg/m ³)	Tack-Free (disposable): 65–125 sec. Tack-Free (refill): 120–200 sec. Cuttable: 60–90 min.	Disposable: 50–90 sec. Refill: 70–105 sec.	Disposable: 12 months System 8 Refill: 6 months System 60 & 120 Refill: 3 months

ITEM	DESCRIPTION	COVERAGE*
P12044	2-12 CHANNEL FILL	12 ft ³ (0.34 m ³)
P12046	2-35 CHANNEL FILL	35 ft ³ (0.99 m ³)
P23011	SYSTEM 8 REFILL	58.8 ft ³ (1.66 m ³)
P23211	SYSTEM 60 REFILL	477.2 ft ³ (13.51 m ³)
P23311	SYSTEM 120 REFILL	870.4 ft ³ (24.65 m ³)



HANDIFOAM® SLOW RISE (HFO)

LOW PRESSURE POUR-IN-PLACE POLYURETHANE FOAM (PIP)

Formulated to spray on vertical surfaces for sound deadening and insulation as well as completely fill voids and cavities, providing rigidity and reinforcing the structure. Meets the Coast Guard specification requirements for flotation in Title 33 Code of federal Regulations, paragraph 183.114.

R-Value	Density	Curing Times	Shelf Life	Approvals
Initial: 5.9 at 1" thick	In-Place: 2.1 lbs/ft ³ (35.2 kg/m ³)	Tack-Free: 60–90 sec. Cuttable: 5–10 min.	Disposable: 6 months Refill: 6 months	Meets the requirements for flotation in Title 33 Code of Federal Regulations, paragraph 183.114

ITEM	DESCRIPTION	COVERAGE*
P12042	2-12 SLOW RISE	12.70 ft ³ (0.36 m ³)
P12043	2-41 SLOW RISE	41.70 ft ³ (1.18 m ³)
P23001	SYSTEM 8 REFILL	70 ft ³ (1.98 m ³)
P23101	SYSTEM 27 REFILL	245.20 ft ³ (6.95 m ³)
P23201	SYSTEM 60 REFILL	563.81 ft ³ (16 m ³)
P23301	SYSTEM 120 REFILL	1,024.70 ft ³ (29 m ³)



MINING SPRAY FOAMS



SILENT-SEAL® VCF
MINE VENTILATION AIR SEALANT (HFO)
 LOW PRESSURE SPRAY POLYURETHANE FOAM (SPF)

ITEM	DESCRIPTION	COVERAGE*
P12045	II-180 SILENT-SEAL	180 bdft (16.7 m ²)

Silent-Seal VCF has been deemed MSHA suitable as an underground mine ventilation sealant, suitability number MSHA-S10/02, minimum applied thickness 1 inch.

Density 1.75 lb/ft ³ (28 kg/m ³)	Curing Times Tack-Free: 10–25 sec. Cuttable: 2–5 min. Fully Cured: 1 hr.	Approvals MSHA-S10/02	Shelf Life Disposable: 12 months	Fire Rating ASTM E162 Flame Spread: 9
---	--	---------------------------------	--	--

*Coverage is based on theoretical calculations for comparison purposes only and will vary depending on ambient and chemical conditions, spray technique and application.

PERSONAL PROTECTIVE EQUIPMENT (PPE)



Working smart is about choosing the best solution for the job and then executing the project safely. When using any low pressure polyurethane foam, we recommend following a safety program, including wearing proper personal protective equipment (PPE).

When spraying any of the HandiFoam spray or pour-in-place polyurethane foams, wear protective glasses with side shields or goggles, nitrile gloves, and clothing that protects against dermal exposure. Recommend using in a well-ventilated area with certified respiratory protection or a powered air purifying respirator (PAPR).





FOAM SEALANTS



HANDIFOAM® STANDARD

ONE-COMPONENT POLYURETHANE FOAM SEALANT (OCF)

Designed to seal and fill small cracks, gaps and voids, creating a rigid, closed cell barrier against drafts, noise, moisture and air infiltration.

● GREENGUARD GOLD CERTIFIED

ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P30002	12 OZ STRAW FOAM	1,996 ft (608 m)
P30101	20 OZ STRAW FOAM	3,317 ft (1,011 m)
P30107	24 OZ STRAW FOAM	3,992 ft (1,217 m)
P30115	24 OZ GUN FOAM	4,403 ft (1,342 m)

R-Value 4.7 at 1" thick	Density Straw: 1.10 lb/ft ³ (17.60 kg/m ³) Gun: 1.00 lb/ft ³ (16 kg/m ³)	Curing Times Tack-Free: ≈ 5 minutes Cuttable: 1 hour Fully Cured: 12–24 hours	Cell Structure 67% CLOSED cell	Fire Rating ASTM E84/UL723 Caulking & Sealants Flame Spread: 25 Smoke Developed: 50	Approvals GREENGUARD Gold CCMC #13626-L	Shelf Life Straw: 18 months Gun: 15 months
-----------------------------------	---	---	--	---	--	---



HANDIFOAM® EXTREME

ONE-COMPONENT POLYURETHANE FOAM SEALANT (OCF)

Formulated specifically for use in extreme Temperatures and low humidity conditions and will cure in outdoor temperatures as low as 0°F (-18°C). HandiFoam Extreme is designed for sealing small cracks and voids, preventing air and moisture infiltration.

● GREENGUARD GOLD CERTIFIED

ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P30120	24 OZ GUN FOAM	4,403 ft (1,342 m)

R-Value 4.7 at 1" thick	Density 1.00 lb/ft ³ (16 kg/m ³)	Curing Times Tack-Free: ≈ 5 minutes Cuttable: 1 hour Fully Cured: 12–24 hours	Cell Structure 70% CLOSED cell	Fire Rating ASTM E84/UL723 Caulking & Sealants Flame Spread: 25 Smoke Developed: 50	Approvals GREENGUARD Gold CCMC #13626-L	Shelf Life Gun: 15 months
-----------------------------------	---	---	--	---	--	-------------------------------------



HANDIFOAM® BLACK

ONE-COMPONENT POLYURETHANE FOAM SEALANT (OCF)

A black foam sealant that is a moisture cured, multipurpose foam sealant specially formulated black in color. HandiFoam Black is ideally suited for areas where product appearance could be a factor such as landscaping, pond and waterfall design or vehicle undercarriages.

ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P30053	12 OZ STRAW FOAM	1,996 ft (608 m)
P30251	24 OZ GUN FOAM	4,403 ft (1,342 m)

R-Value
4.5 at 1" thick

Density
Straw: 1.10 lb/ft³ (17.60 kg/m³)
Gun: 1.00 lb/ft³ (16 kg/m³)

Curing Times
Tack-Free: ~ 5 minutes
Cuttable: 1 hour
Fully Cured: 12–24 hours

Cell Structure
70% CLOSED cell

Fire Rating
ASTM E84/UL723 Caulking & Sealants
Flame Spread: 25
Smoke Developed: 50

Shelf Life
Straw: 18 months
Gun: 15 months



HANDIFOAM® CYLINDER FOAM (HFO)

ONE-COMPONENT POLYURETHANE FOAM SEALANT (OCF)

Formulated with a non-flammable blowing agent and designed to seal and fill small cracks, gaps and voids for a rigid, closed cell barrier. An adapter for gun use (F61125) is available to switch from the wand dispensing tool to a HandiFoam Dispensing Tool.

● GREENGUARD GOLD CERTIFIED

ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P11041	I-260 CYLINDER FOAM <i>CYLINDER ONLY</i>	36,108 ft (11,005 m)
P11042	I-260 CYLINDER FOAM <i>WITH ACCESSORIES</i>	36,108 ft (11,005 m)

R-Value
5 at 1" thick

Density
1.30 lbs/ft³ (20.82 kg/m³)

Curing Times
Tack-Free: ~ 5 minutes
Cuttable: 1 hour
Fully Cured: 12–24 hours

Fire Rating
ASTM E84/UL723 Caulking & Sealants
Flame Spread: 5
Smoke Developed: 20

Approvals
ASTM E84/UL 723 / UL
Classified File
GREENGUARD Gold

Shelf Life
12 months



PERSONAL PROTECTIVE EQUIPMENT (PPE)

Working smart is about choosing the best solution for the job and then executing the project safely. When using any low pressure polyurethane foam, we recommend following a safety program, including wearing proper personal protective equipment (PPE).

When spraying any of the HandiFoam sealants or adhesives, wear protective glasses with side shields or goggles, nitrile gloves, and clothing that protects against dermal exposure. Recommend using in a well-ventilated area.





HANDIFOAM® FIREBLOCK

ONE-COMPONENT POLYURETHANE FOAM SEALANT (OCF)

Designed to seal, fill, bond and stop air infiltration. More effective than traditional fireblock materials at blocking smoke and gases in concealed penetrations from room to room and floor to floor in Type V residential construction.

● GREENGUARD GOLD CERTIFIED

ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P30033	12 OZ STRAW FOAM	1,996 ft (608 m)
P30192	24 OZ STRAW FOAM	3,992 ft (1,217 m)
P30181	24 OZ GUN FOAM	4,403 ft (1,342 m)

R-Value	Density	Curing Times	Cell Structure	Fire Rating	Approvals	Shelf Life
4.5 at 1" thick	Straw: 1.10 lb/ft ³ (17.60 kg/m ³) Gun: 1.00 lb/ft ³ (16 kg/m ³)	Tack-Free: ≈ 5 minutes Cuttable: 1 hour Fully Cured: 12–24 hours	77% CLOSED cell	ASTM E84/UL 723 Caulking & Sealants Flame Spread: 25 Smoke Developed: 50	GREENGUARD Gold CCMC #13626-L UL ER #13919-01	Straw: 18 months Gun: 15 months



HANDIFOAM® FIREBLOCK WEST

ONE-COMPONENT POLYURETHANE FOAM SEALANT (OCF)

A multipurpose formula specifically designed to perform in high temperature, low humidity climates. More effective than traditional fireblock materials at blocking smoke and gases in concealed penetrations from room to room and floor to floor in Type V residential construction. Tested in accordance with AAMA 812 for a low pressure build that will help to not bow windows and doors.

ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P30185	24 OZ GUN FOAM	3,142 ft (958 m)

● GREENGUARD GOLD CERTIFIED

R-Value	Density	Curing Times	Cell Structure	Fire Rating	Approvals	Shelf Life
4.2 at 1" thick	1.40 lb/ft ³ (22.40 kg/m ³)	Tack-Free: ≈ 5 minutes Cuttable: 1 hour Fully Cured: 12–24 hours	87% CLOSED cell	ASTM E84/UL 723 Caulking & Sealants Flame Spread: 25 Smoke Developed: 50	GREENGUARD Gold UL ER #13919-01 AAMA 812-04	Gun: 15 months



HANDIFOAM® WINDOW + DOOR

ONE-COMPONENT POLYURETHANE FOAM SEALANT (OCF)

Tested in accordance with AAMA Verified Components List - AAMA 812, and will help to prevent bowing of windows or doors. Formulated with Dry Seal Technology® to help prevent moisture and mold problems by repelling water.

● GREENGUARD GOLD CERTIFIED

ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P30270	12 OZ STRAW FOAM	1,996 ft (608 m)
P30271	24 OZ STRAW FOAM	3,993 ft (1,217 m)
P30272	24 OZ GUN FOAM	4,403 ft (1,342 m)

R-Value	Density	Curing Times	Cell Structure	Fire Rating	Approvals	Shelf Life
4.7 at 1" thick	Straw: 1.10 lb/ft ³ (17.60 kg/m ³) Gun: 1.00 lb/ft ³ (16 kg/m ³)	Tack-Free: ≈ 5 minutes Cuttable: 1 hour Fully Cured: 12–24 hours	67% CLOSED cell	ASTM E84/UL 723 Caulking & Sealants Flame Spread: 25 Smoke Developed: 50	GREENGUARD Gold AAMA 812-04 CCMC #13626-L	Straw: 18 months Gun: 15 months



HANDIFOAM® WINDOW + DOOR WEST

ONE-COMPONENT POLYURETHANE FOAM SEALANT (OCF)

A multipurpose sealant suitable for use in hot and dry climates. Tested in accordance with AAMA 812-04, AAMA Verified Components List, and will help to prevent bowing of windows or doors.

● GREENGUARD GOLD CERTIFIED

ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P30273	24 OZ GUN FOAM	3,142 ft (958 m)

R-Value 4.2 at 1" thick	Density 1.40 lbs/ft ³ (16 kg/m ³)	Curing Times Tack-Free: ~ 5 minutes Cuttable: 1 hour Fully Cured: 12–24 hours	Cell Structure 87% OPEN cell	Fire Rating ASTM E84/UL723 Caulking & Sealants Flame Spread: 5 Smoke Developed: 20	Approvals GREENGUARD Gold AAMA 812-04	Shelf Life 15 months
-----------------------------------	--	---	--	--	--	--------------------------------



FOAM ADHESIVES



HANDIFOAM® PRO ADHESIVE

ONE-COMPONENT POLYURETHANE FOAM ADHESIVE (OCF)

Adheres to wet, dry or frozen lumber and contains no solvents with a 20 minute open time. Reduces fastener use, nail pops and squeaks, and is especially easy to apply in cold temperatures.


ITEM	DESCRIPTION	COVERAGE (AT 1/4" BEAD)
P30296	24 OZ GUN FOAM	3,500 ft (1,067 m)

Density 1.25 lbs/ft ³ (20 kg/m ³)	Fully Cured 12–24 hours	Full Bond Time 7 days	Open Time 20 minutes	Shelf Life 24 months
--	-----------------------------------	---------------------------------	--------------------------------	--------------------------------

TWO-COMPONENT ACCESSORIES

ColorWise[®] TEMPERATURE WARNING NOZZLES

ColorWise[®] Temperature Warning Nozzles change from clear to blue, indicating that the chemical has reached cold temperatures below 60°F (16°C) and the foam should not be dispensed. Stop spraying to avoid off-ratio foam and yield-loss, and properly condition the chemical before spraying again.

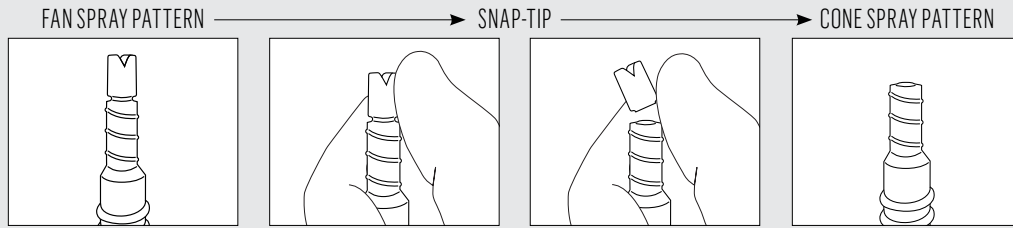

HANDI-GUN[®] THE ULTIMATE WAY TO SPRAY

The Handi-Gun[®] has convenient ColorWise[®] Temperature Warning Nozzles attachments with a snap-on, snap-off connection. The responsive trigger allows for accurate metering, precise application, labor savings and reduced waste. Clear hoses attached to the Handi-Gun provide easy viewing of the chemical flow.



FOAMPRO[®]

The FoamPro[®] Auto-Calibrator is a low pressure polyurethane foam dispensing breakthrough that provides incredible ease of use and unprecedented productivity. The Auto-Calibrator provides precise chemical control with no manual calibration needed. This product is available for use with all of our low pressure spray and pour-in-place polyurethane foam refillable systems.



ONE-COMPONENT ACCESSORIES



Item: F61033

HANDIFOAM® HT330

The HT330 is a durable, solvent-resistant, entry-level dispensing unit for the professional contractor that allows for adjustable bead control. The HT330 has a barrel length of 7 inches (18 cm).



Item: F61055

HANDIFOAM® HT550

The HT550 is a durable, intermediate dispensing unit designed for the professional contractor for frequent use. This gun allows for adjustable bead control, is solvent resistant, and includes a non-stick teflonized basket and needle valve. The HT550 has a barrel length of 7 inches (18 cm).



Item: F61077

HANDIFOAM® HT770

The HT770 is a premium, all-metal barrel dispensing unit designed for the professional contractor for frequent use. This gun allows for adjustable bead control, is solvent resistant, includes a non-stick teflonized basket and needle valve, and offers available replacement non-stick teflonized basket, increasing the longevity of the dispensing unit. The HT770 has a barrel length of 7 inches (18 cm).

HANDIFOAM® MULTIPURPOSE CLEANER



HandiFoam® Cleaner is a spray solvent used to dissolve uncured foam. HandiFoam Cleaner can also be attached to the HandiFoam Dispensing Units, allowing it to be flushed and kept clean and operable.

Item: P10083

SPECIALTY GUN FOAM APPLICATORS



Specialty Dispensing Tools have an ergonomic design for subfloor and other hard-to-reach applications. They come in two barrel lengths, 22 inches (56 cm) or 39 inches (100cm).

22 inch Specialty Dispensing Tool: F61020
39 inch Specialty Dispensing Tool: F61060

PLASTIC EXTENSION TIPS



Available for use with the HandiFoam Dispensing Tools HT330 (F61033), HT550 (F61055) and HT770 (F61077) for various window & door applications.

Item: E54300

INNOVATIONS

GREENGUARD CERTIFICATION

GREENGUARD Certification contributes to healthier indoor environments by identifying low-emitting products. This prestigious certification showcases our commitment to product stewardship by contributing to healthier indoor environments with our low-emitting products. Most of ICP's certified products received the GREENGUARD Gold Certification. The GREENGUARD Gold certifications tests products designed for use in office environments, schools, daycares or other indoor spaces. Visit www.greenguard.org for more information.

GREENGUARD GOLD CERTIFIED

Designates which products received the GREENGUARD Gold Certification.



LOW GWP DEVELOPMENTS

Many states have implemented phasing out high GWP (Global Warming Potential) blowing agents in low pressure polyurethane spray foams and adhesives that began in January 2021, while many other states have active rule making in process.

As an industry leader, ICP is built its commitment to develop products, exclusive technologies, and services that improve the overall product performance, safety and experience for our customers. We have taken these regulations as an opportunity to improve our polyurethane foam product line by becoming regulatory compliant and improving formulation performance, packaging and the dispensing system.



PRODUCT ORDERING GUIDE

SPRAY POLYURETHANE FOAM (SPF) KITS - DISPOSABLE

ITEM #	UPC #	DESCRIPTION	SIZE	KIT DIMENSIONS	UNITS PER KIT/CASE	KIT WEIGHT	PALLET QTY (KITS/CASES PER PALLET)	YIELD
P12130	6 11131 18540 7	HANDIFOAM E84 (HFO)	II-15	7" W x 12" H (178 MM x 305 MM)	12 KITS/CASE	4.04 LBS (1.8 KG)	25 CASE	15 BDFT (1.4 M ²)
P12135	6 11131 18541 4	HANDIFOAM E84 (HFO)	II-105	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	26.4 LBS (12.0 KG)	26 KITS	105 BDFT (9.8 M ²)
P12140	6 11131 18542 1	HANDIFOAM E84 (HFO)	II-205	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	41.0 LBS (18.6 KG)	26 KITS	205 BDFT (19 M ²)
P12145	6 11131 18543 8	HANDIFOAM E84 (HFO)	II-605	25" W x 18.25" H (635 MM x 464 MM)	2 BOXES/KIT	115.7 LBS (52.5 KG)	9 KITS	605 BDFT (56.2 M ²)
P12145W	6 11131 18544 5	HANDIFOAM E84 (HFO) (INCLUDES 25' GHA)	II-605	25" W x 18.25" H (635 MM x 464 MM)	2 BOXES/KIT	115.7 LBS (52.5 KG)	9 KITS	605 BDFT (56.2 M ²)
P12146	6 11131 18545 2	HANDIFOAM E84 (HFO) (EXCLUDES GHA / CYLINDERS ONLY)	II-605	25" W x 18.25" H (635 MM x 464 MM)	2 BOXES/KIT	115.7 LBS (52.5 KG)	9 KITS	605 BDFT (56.2 M ²)
P12025	0 26547 12025 4	HANDIFOAM HIGH DENSITY (HFO)	II-60	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	26.4 LBS (12.0 KG)	26 KITS	60 BDFT (5.6 M ²)
P12030	0 26547 12030 8	HANDIFOAM HIGH DENSITY (HFO)	II-115	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	41.0 LBS (18.6 KG)	26 KITS	115 BDFT (10.7 M ²)
P12035	0 26547 12035 3	HANDIFOAM HIGH DENSITY (HFO)	II-340	25" W x 18.25" H (635 MM x 464 MM)	2 BOXES/KIT	115.7 LBS (52.5 KG)	9 KITS	340 BDFT (31.8 M ²)
P12741	6 11131 16723 6	HANDIFOAM FR BLACK (HFO)	II-600	25" W x 18.25" H (635 MM x 464 MM)	2 BOXES/KIT	115.7 LBS (52.5 KG)	9 KITS	601 BDFT (55.8 M ²)
P12630	6 11131 17918 5	HANDIFOAM OPEN CELL (HFO)	II-40	7" W x 12" H (178 MM x 305 MM)	12 KITS/CASE	4.04 LBS (1.8 KG)	25 CASE	40 BDFT (3.7 M ²)
P12005	6 11131 17917 8	HANDIFOAM OPEN CELL (HFO)	II-250	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	25.9 LBS (11.7 KG)	26 KITS	250 BDFT (23 M ²)
P12010	6 11131 17916 1	HANDIFOAM OPEN CELL (HFO)	II-500	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	40.8 LBS (18.5 KG)	26 KITS	500 BDFT (46.5 M ²)
P12015	6 11131 17915 4	HANDIFOAM OPEN CELL (HFO)	II-1550	25" W x 18.25" H (635 MM x 464 MM)	2 BOXES/KIT	121 LBS (54.8 KG)	9 KITS	1,550 BDFT (144 M ²)
P12040	0 26547 12040 7	HANDIFOAM LINER ADHESIVE (HFO)	II-532	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	38.8 LBS (17.6 KG)	26 KITS	532 FT ² (49.4 M ²)

POUR-IN-PLACE POLYURETHANE FOAM (PIP) KITS - DISPOSABLE

ITEM #	UPC #	DESCRIPTION	SIZE	KIT DIMENSIONS	UNITS PER KIT/CASE	KIT WEIGHT	PALLET QTY (KITS PER PALLET)	YIELD
P12044	0 26547 12044 5	HANDIFOAM CHANNEL FILL (HFO)	2-12	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	41.0 LBS (18.6 KG)	26 KITS	12 FT ³ (0.34 M ³)
P12046	0 26547 12046 9	HANDIFOAM CHANNEL FILL (HFO)	2-35	25" W x 18.25" H (635 MM x 464 MM)	2 BOXES/KIT	115.7 LBS (52.5 KG)	9 KITS	35 FT ³ (0.99 M ³)
P12042	0 26547 12042 1	HANDIFOAM SLOW RISE (HFO)	2-12	15.5" W x 16" H (394 MM x 406 MM)	1 BOX/KIT	41.0 LBS (18.6 KG)	26 KITS	12.70 FT ³ (0.36 M ³)
P12043	0 26547 12043 8	HANDIFOAM SLOW RISE (HFO)	2-41	25" W x 18.25" H (635 MM x 464 MM)	2 BOXES/KIT	115.7 LBS (52.5 KG)	9 KITS	41.70 FT ³ (1.2 M ³)

LOW PRESSURE MINE FOAM - DISPOSABLE

ITEM #	UPC #	DESCRIPTION	SIZE	KIT DIMENSIONS	UNITS PER KIT/CASE	KIT WEIGHT	PALLET QTY (KITS/CASES PER PALLET)	YIELD
P12045	0 26547 12045 2	SILENT-SEAL VCF (HFO)	II-180	15.5" W x 16" H (394 MM x 406 MM)	1 BOX	37.8 LBS (17.1 KG)	26 KITS	180 BDFT (16.7 M ²)

SPRAY POLYURETHANE FOAM (SPF) - REFILLABLE SYSTEMS

ITEM #	UPC #	DESCRIPTION	SIZE	CYLINDER DIMENSIONS (EA.)	UNITS PER CASE	CYLINDER SET WEIGHT	PALLET QTY (CYLINDERS PER PALLET)	YIELD
P23000	6 11131 18547 6	SYSTEM 8 HANDIFOAM E84 (HFO)	8 GALLON	12.5" W x 28" H (318 MM x 711 MM)	-	207 LBS (93.9 KG)	4	1,010 FT ² (93.9 M ²)
P23100	6 11131 18548 3	SYSTEM 17 HANDIFOAM E84 (HFO)	17 GALLON	14" W x 34" H (356 MM x 864 MM)	-	534 LBS (242.2 KG)	-	1,980 FT ² (184 M ²)
P23200	6 11131 18549 0	SYSTEM 27 HANDIFOAM E84 (HFO)	27 GALLON	15" W x 52" H (381 MM x 1321 MM)	-	702 LBS (318.4 KG)	-	3,120 FT ² (290 M ²)
P23400	6 11131 18550 6	SYSTEM 60 HANDIFOAM E84 (HFO)	60 GALLON	30" W x 51" H (762 MM x 1295 MM)	-	1720 LBS (780.2 KG)	-	6,840 FT ² (635 M ²)
P23800	6 11131 18551 3	SYSTEM 120 HANDIFOAM E84 (HFO)	120 GALLON	30" W x 59" H (762 MM x 1499 MM)	-	1900 LBS (861.8 KG)	-	11,400 FT ² (1,059 M ²)
P23083	6 11131 16575 1	SYSTEM 8 HANDIFOAM FR BLACK (HFO)	8 GALLON	12.5" W x 28" H (318 MM x 711 MM)	-	207 LBS (93.9 KG)	4	1,015 FT ² (94.30 M ²)
P23223	6 11131 16580 5	SYSTEM 60 HANDIFOAM FR BLACK (HFO)	60 GALLON	30" W x 51" H (762 MM x 1295 MM)	-	1720 LBS (780.2 KG)	-	7,783 FT ² (723 M ²)
P23317	6 11131 16583 6	SYSTEM 120 HANDIFOAM FR BLACK (HFO)	120 GALLON	30" W x 59" H (762 MM x 1499 MM)	-	2808 LBS (1273.6 KG)	-	13,989 FT ² (1,300 M ²)

POUR-IN-PLACE POLYURETHANE FOAM (PIP) - REFILLABLE SYSTEMS

ITEM #	UPC #	DESCRIPTION	SIZE	CYLINDER DIMENSIONS (EA.)	UNITS PER CASE	CYLINDER SET WEIGHT	PALLET QTY (CYLINDERS PER PALLET)	YIELD
P23011	0 26547 23011 3	SYSTEM 8 HANDIFOAM CHANNEL FILL (HFO)	8 GALLON	12.5" W x 28" H (318 MM x 711 MM)	-	414 LBS (187.7 KG)	4	58.80 FT ³ (1.7 M ³)
P23211	0 26547 23211 7	SYSTEM 60 HANDIFOAM CHANNEL FILL (HFO)	60 GALLON	30" W x 51" H (762 MM x 1295 MM)	-	2832 LBS (1284.5 KG)	-	477.20 FT ³ (13.5 M ³)
P23311	0 26547 23311 4	SYSTEM 120 HANDIFOAM CHANNEL FILL (HFO)	120 GALLON	30" W x 59" H (762 MM x 1499 MM)	-	2526 LBS (5052 KG)	-	870.40 FT ³ (24.7 M ³)
P23001	0 26547 23001 4	SYSTEM 8 HANDIFOAM SLOW RISE (HFO)	8 GALLON	12.5" W x 28" H (318 MM x 711 MM)	-	193 LBS (87.5 KG)	-	70 FT ³ (1.9 M ³)
P23101	0 26547 23101 1	SYSTEM 27 HANDIFOAM SLOW RISE (HFO)	27 GALLON	15" W x 52" H (381 MM x 1321 MM)	-	755 LBS (342.4 KG)	-	245.24 FT ³ (6.9 M ³)
P23201	0 26547 23201 8	SYSTEM 60 HANDIFOAM SLOW RISE (HFO)	60 GALLON	30" W x 51" H (762 MM x 1295 MM)	-	1904 LBS (863.6 KG)	-	563.81 FT ³ (16 M ³)
P23301	0 26547 23301 5	SYSTEM 120 HANDIFOAM SLOW RISE (HFO)	120 GALLON	30" W x 59" H (762 MM x 1499 MM)	-	2808 LBS (1273.6 KG)	-	1,024.76 FT ³ (29 M ³)

ONE-COMPONENT POLYURETHANE FOAM SEALANTS (OCF) – AEROSOL

ITEM #	UPC #	DESCRIPTION	SIZE	CAN DIMENSIONS (EA.)	UNITS PER CASE	CASE WEIGHT	PALLET QTY (CASES PER PALLET)	YIELD [AT ¼" (6.3 MM) BEAD]
P30002	0 26547 30002 1	HANDIFOAM STRAW FOAM	12 OZ (340 G)	2.7" W x 8" H (69 MM x 203 MM)	12	14 LBS (6.4 KG)	75	1,996 FT (608 M)
P30101	0 26547 30101 1	HANDIFOAM STRAW FOAM	20 OZ (567 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	21 LBS (9.5 KG)	48	3,317 FT (1,011 M)
P30107	0 26547 30107 3	HANDIFOAM STRAW FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	3,992 FT (1,217 M)
P30115	0 26547 30115 8	HANDIFOAM GUN FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	4,403 FT (1,342 M)
P30120	0 26547 30120 2	HANDIFOAM EXTREME GUN FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	4,403 FT (1,342 M)
P30053	0 26547 30053 3	HANDIFOAM BLACK STRAW FOAM	12 OZ (340 G)	2.7" W x 8" H (69 MM x 203 MM)	12	14 LBS (6.4 KG)	75	1,996 FT (608 M)
P30251	0 26547 30251 3	HANDIFOAM BLACK GUN FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	4,403 FT (1,342 M)
P30033	0 26547 30033 5	HANDIFOAM FIREBLOCK STRAW FOAM	12 OZ (340 G)	2.7" W x 8" H (69 MM x 203 MM)	12	14 LBS (6.4 KG)	75	1,996 FT (608 M)
P30192	0 26547 30192 9	HANDIFOAM FIREBLOCK STRAW FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	3,992 FT (1,217 M)
P30181	0 26547 30181 3	HANDIFOAM FIREBLOCK GUN FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	4,403 FT (1,342 M)
P30185	0 26547 30185 1	HANDIFOAM FIREBLOCK WEST GUN FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	3,142 FT (958 M)
P30270	0 26547 30270 4	HANDIFOAM WINDOW + DOOR STRAW FOAM	12 OZ (340 G)	2.7" W x 8" H (69 MM x 203 MM)	12	14 LBS (6.4 KG)	75	1,996 FT (608 M)
P30271	0 26547 30271 1	HANDIFOAM WINDOW + DOOR STRAW FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	4,403 FT (1,342 M)
P30272	0 26547 30272 8	HANDIFOAM WINDOW + DOOR GUN FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	4,403 FT (1,342 M)
P30273	0 26547 30273 6	HANDIFOAM WINDOW + DOOR WEST GUN FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	3,142 FT (958 M)

ONE-COMPONENT POLYURETHANE FOAM SEALANTS (OCF) – AEROSOL

ITEM #	UPC #	DESCRIPTION	SIZE	CAN DIMENSIONS (EA.)	UNITS PER CASE	CASE WEIGHT	PALLET QTY (CASES PER PALLET)	YIELD [AT ¼" (6.3 MM) BEAD]
P30296	0 26547 30296 4	HANDIFOAM PRO ADHESIVE GUN FOAM	24 OZ (680 G)	2.7" W x 11.25" H (69 MM x 286 MM)	12	24 LBS (10.9 KG)	48	3,500 FT (1,067 M)

ONE-COMPONENT POLYURETHANE FOAM SEALANTS (OCF) – CYLINDERS

ITEM #	UPC #	DESCRIPTION	SIZE	CAN DIMENSIONS (EA.)	UNITS PER CASE	CASE WEIGHT	PALLET QTY (CASES PER PALLET)	YIELD [AT ¼" (6.3 MM) BEAD]
P11041	0 26547 11041 5	HANDIFOAM CYLINDER FOAM (HFO) CYLINDER ONLY	I-260	9.5" W x 17" H (241 MM x 432 MM)	1 BOX	23 LBS (10.4 KG)	40	36,108 FT (11,005 M)
P11042	0 26547 11042 2	HANDIFOAM CYLINDER FOAM (HFO) WITH ACCESSORIES	I-260	9.5" W x 17" H (241 MM x 432 MM)	1 BOX	24 LBS (10.9 KG)	40	36,108 FT (11,005 M)

HANDIFOAM® MULTIPURPOSE CLEANER

ITEM #	UPC #	DESCRIPTION	SIZE	CAN DIMENSIONS (EA.)	UNITS PER CASE	CASE WEIGHT	PALLET QTY (CASES PER PALLET)	YIELD [AT ¼" (6.3 MM) BEAD]
P10083	0 26547 10083 6	12 OZ. HANDIFOAM MULTIPURPOSE CLEANER	12 OZ (340 G)	2.7" W x 8" H (69 MM x 203 MM)	12	14 LBS (6.4 KG)	75	–

HANDIFOAM® GUN FOAM APPLICATORS

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
F61033	0 26547 61033 5	HT330 GUN FOAM APPLICATOR	7 IN (18 CM) BARREL
F61055	0 26547 61055 7	HT550 GUN FOAM APPLICATOR	7 IN (18 CM) BARREL
F61077	0 26547 61077 9	HT770 GUN FOAM APPLICATOR	7 IN (18 CM) BARREL

SPECIALTY DISPENSING GUNS

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
F61020	0 26547 61020 5	22" GUN FOAM APPLICATOR	22 IN (56 CM) BARREL
F61060	0 26547 61060 1	39" GUN FOAM APPLICATOR	39 IN (100 CM) BARREL

MISC. OCF SEALANT & ADHESIVE FOAM ACCESSORIES

ITEM #	UPC #	DESCRIPTION
F62180	0 26547 62180 5	I-260 HOSE ASSEMBLY
F61125	0 26547 61125 7	ADAPTER FOR GUN USE WITH CYLINDER
E54300	0 26547 54300 8	PLASTIC EXTENSION TIPS (5 PACK) (FOR F61033, F61055 & F61077)

PRODUCT ORDERING GUIDE

COLORWISE® NOZZLES*

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
F66113	0 26547 66113 9	COLORWISE LONG CONE NOZZLE (8 PACK)	-
F66117	0 26547 66117 7	COLORWISE LONG CONE NOZZLE (25 PACK)	-
F66129	6 11131 15931 6	COLORWISE SNAP-TIP NOZZLE PACK (8 PACK)	-
F66141	6 11131 15932 3	COLORWISE SNAP-TIP NOZZLE PACK (25 PACK)	-

RATIO NOZZLES

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
F66118	0 26547 66118 4	RATIO NOZZLE (6 PACK)	
F66119	0 26547 66119 1	RATIO NOZZLE (25 PACK)	

MISC. SPF & PIP ACCESSORIES

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
F66200	0 26547 66200 6	9.5' (3 M) HANDI-GUN HOSE ASSEMBLY	
F66210	0 26547 66210 5	15' (5 M) HANDI-GUN HOSE ASSEMBLY	
F66230	0 26547 66230 3	25' (8 M) HANDI-GUN HOSE ASSEMBLY	
F65245	0 26547 65245 8	SPRAY FOAM CYLINDER WRAP*	*Quantity of 2 needed for a complete kit.

STARTER KITS (SPF & PIP)

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
70201	-	MOBILE MAGNUM® STARTER KIT Includes: F65005 Nitrogen Regulator, F65090 and F65100 Pigtail Regulator Hoses, F66350 Mobile Magnum Cart, F65252 (1/2") 100' Handi-Gun Hose Assembly, F66141 ColorWise Snap-Tip Nozzles (25 pack), F66117 ColorWise Long Cone Nozzles (25 pack), F65301 Refill Cylinder Pressure Gauge, 70209 Mobile Magnum Heat Wrap with Lid.	
F65275	0 26547 65275 5	MAGNUM HEATED SYSTEM® STARTER KIT Includes: F65005 Nitrogen Regulator, F65090 6' (2m) Nitrogen Hose with Coupling (A), F65100 6' (2m) Nitrogen Hose with Coupling (B), F66220 10' Handi-Gun Hose Assembly, F66117 ColorWise Long Cone Nozzle (25 pack), F66141 ColorWise Snap-Tip Nozzles (25-Pack), F65301 Refill Cylinder Pressure Gauge, 62988512125 Female Cylinder Pressure Connector.	
F65285	0 26547 65285 4	FOAMPRO® AUTO CALIBRATOR STARTER KIT Includes: Complete Wall Mount, Auto Calibrator, A & B Side Filter Unit with 72" Whip, A & B Ball Valve Assembly, Single Regulator for Auto Calibrator and Cylinder Vent Valve, F66220 10' Handi-Gun Hose Assembly, F66117 ColorWise Long Cone Nozzle (25 pack), F66141 ColorWise Snap-Tip Nozzles (25-Pack), 6248475320 Auto Calibrator Lubricant.	
F65251	0 26547 65251 9	CONTRACTOR SAFETY KIT Includes: Safety glasses, nitrile gloves (2 pairs), NIOSH-approved respirator (organic vapor cartridges, dust/mist prefilters and 10 hygienic wipes), Tyvek® apron & arm gauntlets.	

MISC. REFILL ACCESSORIES

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
F66350	0 26547 66350 8	MOBILE MAGNUM / SYSTEM 8 CART	
F65311	0 26547 65311 0	GRAM SCALE	
F65160	0 26547 65160 4	HOSE-TO-GUN ON/OFF VALVE (A OR B)	
62988512117	6 11131 15982 8	R909 CYLINDER PRESSURE CONNECTOR	
62988512125	6 11131 15983 5	R909F FEMALE CYLINDER PRESSURE CONNECTOR	

REFILLABLE SYSTEM GUN HOSE ASSEMBLIES

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
F66220	0 26547 66220 4	10" (25 CM) HANDI-GUN HOSE ASSEMBLY	
F66252	0 26547 66252 5	(1/2") 100'(30M) HANDI-GUN HOSE ASSEMBLY	
F66553	0 26547 66553 3	HANDIFOAM 25' (7.6M) NON-HEATED HOSE - 3/8" (9.5MM)	
F66554	0 26547 66554 0	HANDIFOAM 50' (15.2M) NON-HEATED HOSE - 3/8" (9.5MM)	
F66550	0 26547 66550 2	HANDIFOAM 25' (7.6M) MAGNUM HEATED HOSE - 3/8" (9.5MM)	
F66558	0 26547 66558 8	HANDIFOAM 50' (15.2M) MAGNUM HEATED HOSE - 3/8" (9.5MM)	
F66551	0 26547 66551 9	HANDIFOAM 75' (23M) MAGNUM HEATED HOSE - 1/4" (6.4 MM)	
F66552	0 26547 66552 6	HANDIFOAM 150' (45M) MAGNUM HEATED HOSE - 1/4" (6.4MM)	
F66555	0 26547 66555 7	HANDIFOAM 10' (3M) NON-INSULATED WHIP HOSE SET - 1/4" (6.5MM)	
F65281	0 26547 65281 6	MANUAL CALIBRATION - FILTER ASSEMBLY TO HANDIFOAM HOSE VALVE KIT	
F65282	0 26547 65282 3	AUTO CALIBRATOR TO TWIN LINE HOSE VALVE KIT	
F65283	0 26547 65283 0	DISPENSING HOSE TO WHIP HOSE VALVE KIT	
F65284	0 26547 65284 7	MANUAL CALIBRATION - FILTER TO TWIN LINE VALVE KIT	
F65286	0 26547 65286 1	DISPENSING HOSE TO HANDI-GUN HOSE ASSEMBLY VALVE KIT	
F65287	0 26547 65287 8	AUTO CALIBRATOR TO HANDIFOAM HOSE VALVE KIT	
F65288	0 26547 65288 5	1/2" X 90 A&B FILTER SET (NO HOSE)	

HEATED BLANKETS

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
F65230	0 26547 65230 4	HEATED CYLINDER WRAP - SYSTEM 8 REFILL (ONE WRAP & ONE HOOD)*	*Quantity of 2 needed for a complete refill set.
F65231	0 26547 65221 2	HEATED CYLINDER WRAP - SYSTEM 17 REFILL (ONE WRAP & ONE HOOD)*	*Quantity of 2 needed for a complete refill set.
F65232	0 26547 65230 4	HEATED CYLINDER WRAP - SYSTEM 27 REFILL (ONE WRAP & ONE HOOD)*	*Quantity of 2 needed for a complete refill set.
F65233	0 26547 65235 9	HEATED CYLINDER WRAP - SYSTEM 60 REFILL (ONE WRAP & ONE HOOD)*	*Quantity of 2 needed for a complete refill set.
F65234	0 26547 65234 2	HEATED CYLINDER WRAP - SYSTEM 120 REFILL (ONE WRAP & ONE HOOD)*	*Quantity of 2 needed for a complete refill set.

FOAMPRO AUTO CALIBRATOR EQUIPMENT

ITEM #	UPC #	DESCRIPTION	ADDITIONAL
62988511564	6 11131 15969 9	IN106 AUTO CALIBRATOR STROKE COUNTER CONVERSION KIT	
62000411622	6 11131 15970 5	LUBRICANT PRESSURE CAN	
6248475302	6 11131 15971 2	IN109 AUTO CALIBRATOR LUBRICANT	
62988511705	6 11131 15972 9	IN122A 72" (1.8 M) X 3/8" (9.5 MM) RED SIDE FILTER COMPLETE	
62988511713	6 11131 15973 6	IN122B 72" (1.8 M) X 3/8" (9.5 MM) BLUE SIDE FILTER COMPLETE	
62988511812	6 11131 15974 3	IN218 CYLINDER VENT VALVE	
62988511861	6 11131 15975 0	IN901 SINGLE REGULATOR ASSEMBLY	
62988511754	6 11131 15976 7	IN140 NITROGEN REGULATOR CHECK VALVE	
62988512026	6 11131 15977 4	R901 REGULATOR ASSEMBLY (REGULATOR ONLY)	
62988512091	6 11131 15978 1	R908B 10' (3 M) BLUE NITROGEN HOSE	
62988512109	6 11131 15979 8	R908R 10' (3 M) RED NITROGEN HOSE	
F65274	0 26547 65274 8	AUTO CALIBRATOR COMPLETE INLET/OUTLET FIXTURE SET	
F65282	0 26547 65282 3	AUTO CALIBRATOR TO TWIN LINE HOSE VALVE KIT	



Does Your House
Fit the Bill?



**Handi
Foam®**
Completely Professional.™



www.HandiFoam.com

ICP Construction, Inc.
150 Dascomb Road | Andover, MA 01810
866.667.5119 | www.icpgroup.com



HandiFoam® products are composed of a diisocyanate, blowing agent, amine catalyst and polyol. Consult the product's SDS (available at www.handifoam.com) for specific information. The urethane foam produced from these ingredients will support combustion and may present a fire hazard if exposed to a fire or excessive heat about 240°F (116°C). Wear protective glasses with side shields or goggles, nitrile gloves, and clothing that protects against dermal exposure. Recommend using in a well ventilated area with certified respiratory protection or a powered air purifying respirator (PAPR). See SDS (available at www.handifoam.com) for specific information. For more information regarding a certified respiratory program please visit <http://www.cdc.gov/niosh/>. To view or receive a copy of ICP Group's respirator program, please contact Customer Care at 1-800-321-5585. Personal Protective Equipment can be purchased through ICP distribution by purchasing the HandiFoam® Contractor Safety Kit (F6525). The Contractor Safety Kit includes: nitrile gloves, contractor safety glasses, and a NIOSH approved negative pressure half mask respirator. FOR PROFESSIONAL USE ONLY.

H00001 - Rev. 03/2025